

DUAL WASH PRO SERIES – COLD WATER

AVAILABLE Q2 2025


Effortlessly transition between soft washing and pressure washing with a plug-and-play design—no wires, batteries, or electronics needed. Built with chemical-resistant seals and stainless-steel fittings, it offers exceptional durability and corrosion resistance. Streamline your workflow by replacing multiple machines with one versatile solution, delivering optimal cleaning performance while saving water.

LIMITED WARRANTY

- All Units**
- 10yr Baseplate
 - 5yr Pump
 - Lifetime Pump Manifold
 - 3yr Commercial HONDA® Engine
 - 5yr Commercial CRX® Engine

FEATURES

- Comet TW-D triplex pump with a stainless steel or nickel-plated manifold and long-life, chemical-resistant HP seals, including SH
- Stainless steel unloaders – 6500 PSI
- Stainless steel fittings and couplers
- Stainless steel heavy-duty 3-way ball valve for simple cleaning-mode control
- 2:1 gearbox
- Welded anodized aluminum base plate
- Always full flow
- Plug-n-play hookup
- Pressure relief valve
- Thermal relief valve
- Soft wash bypass for remote tank applications
- Patent pending

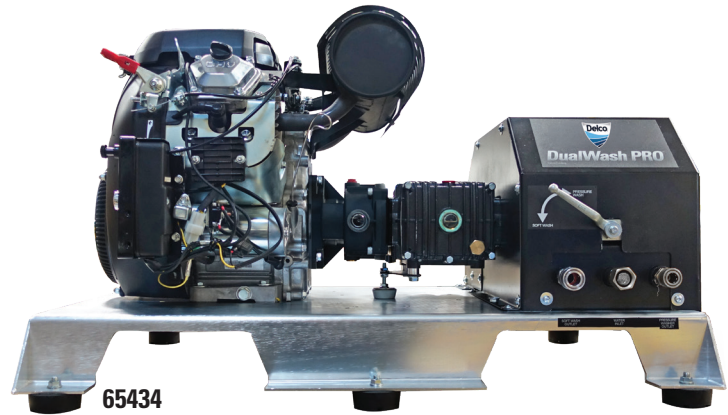

MODEL #	PART #	HP PRESSURE	SW PRESSURE	FLOW HP/SW	ENGINE	PUMP DRIVE	MANIFOLD
DWP3080133ESSM ¹	65434	3000 PSI	300 PSI	8 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP3080133ENPM ¹	65438	3000 PSI	300 PSI	8 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass
DWP3080233ESSM ¹	65437	3000 PSI	300 PSI	8 GPM	HONDA® iGX700* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP3080233ENPM ¹	65441	3000 PSI	300 PSI	8 GPM	HONDA® iGX700* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass
DWP3010133ESSM ¹	65436	3000 PSI	300 PSI	10 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP3010133ENPM ¹	65440	3000 PSI	300 PSI	10 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass
DWP4080133ESSM ¹	65435	4000 PSI	300 PSI	8 GPM	CRX® 750* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP4080133ENPM ¹	65439	4000 PSI	300 PSI	8 GPM	CRX® 750* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass

OPTIONAL ACCESSORIES (sold separately and available upon order)

PART #	DESCRIPTION
80630	50' Soft Wash Hose
80631	Wash Down Gun
80634	8.0 GMP Chemical Injector Kit
80635	10.0 GPM Chemical Injector Kit
80633	Stainless-steel Quick Coupler Kit <ul style="list-style-type: none"> • Includes socket and plug connections

BASEPLATE

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant
- Forklift slots
- Rubber vibration dampers

ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 680	679cc
CRX® 750	750cc
HONDA® iGX700	688cc

DIMENSIONS & WEIGHTS

All units L 156" x W 68" x H 62" | 254 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

For more information on how to order, please contact your sales representative.